



说明书材质要求：80g 双胶纸	说明书成品尺寸：105*143mm
Pantone 137C Black （两色印刷）	
折叠方式：风琴折	备注：
特别注意：此页内容不印刷	

风琴折 + 对折 页面顺序 16P 页面顺序 <table><tr><td>9</td><td>10</td><td>11</td><td>封面</td></tr><tr><td>12</td><td>13</td><td>14</td><td>封底</td></tr></table> <table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>5</td><td>6</td><td>7</td><td>8</td></tr></table>	9	10	11	封面	12	13	14	封底	1	2	3	4	5	6	7	8	20P 页面顺序 <table><tr><td>11</td><td>12</td><td>13</td><td>14</td><td>封面</td></tr><tr><td>15</td><td>16</td><td>17</td><td>18</td><td>封底</td></tr></table> <table><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr><tr><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr></table>	11	12	13	14	封面	15	16	17	18	封底	1	2	3	4	5	6	7	8	9	10
9	10	11	封面																																		
12	13	14	封底																																		
1	2	3	4																																		
5	6	7	8																																		
11	12	13	14	封面																																	
15	16	17	18	封底																																	
1	2	3	4	5																																	
6	7	8	9	10																																	


更改记录	1. 非自制工厂			1. 改为彩印			
	0124.V02	2024.01.11	YJJ	0624.V03	2024.06.03	Athena	
	版本号	日期	设计师	版本号	日期	设计师	

INGCO

www.ingco.com

**PRODUCT
MANUAL**

AUTO AIR COMPRESSOR

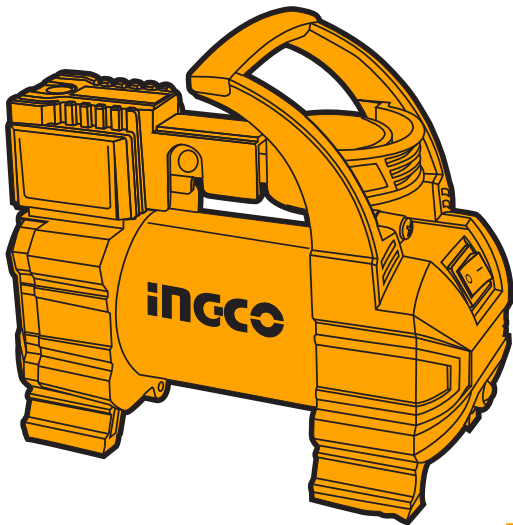

AAC1408 AAC1408xy
x (blank, 1,2,3,4,5,6,7,8,9,E,S,A,M);
y (blank, -1,-2,-3,-4,-5,-6,-7,-8,-9,E,S,A,M)



GENERAL SAFETY WARNINGS** WARNING**

Read all safety warnings and all instructions.

Save all warnings and instructions for future reference.

Work area safety

Keep work area clean and well lit. Cluttered or dark areas invite accidents.

- **Do not operate compressor in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** *Power tools create sparks which may ignite the dust or fumes.*
- **Keep children and bystanders away while operating the compressor.** *Distractions can cause you to lose control.*
- **The plug must match the outlet.** *Never modify the plug in any way.*
- **Do not expose the compressor to rain or wet conditions.** *Water entering the compressor will increase the risk of damage.*
- **Do not use if the switch (1) does not turn the compressor on and off.**
- **Disconnect the plug from the power source tool before making any adjustments, changing accessories, or storing power tools.** *Such preventive safety measures reduce the risk of starting the power tool accidentally.*
- **Store compressor out of the reach of children and do not allow persons unfamiliar with the compressor or these instructions to operate the compressor.**
- **Always check the compressor before use.** *If damaged, or worn, do not use.*

ADDITIONAL SAFETY WARNING

- This appliance may not be used by children or people with reduced physical, sensory or mental capabilities or a lack of experience and knowledge. *Children must not use the appliance as a plaything. Cleaning and user maintenance tasks may not be carried out by children unless they are supervised.*
- Avoid using the compressor at temperatures below +5 degrees.
- Never leave the compressor unsupervised while it is in use.
- Ensure that the ON/OFF switch is turned off when connecting to the power supply.

CAUTION

Operate the compressor only for a short time. The appliance may overheat if operated continuously for longer than 10 minutes. Switch the appliance off immediately and allow it to cool down for at least 10 minutes.

- Risk of injury! Do not inflate any objects to more than the intended pressure. *They could burst and cause injury and/or material damage.*
- Do not exceed the permissible output range of the compressor. *Do not pump up any lorry, tractor or other large tyres.*
- Never use the appliance for purposes other than the ones for which it was designed.
- The appliance must always be kept clean, dry and free from oil or grease.
- Stay alert, watch what you are doing and use common sense when operating a power tool. *Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication.*
- Use personal protective equipment. *The use of personal protective equipment such as Eye protection and hearing protection is recommended.*
- Prevent unintentional starting. *Ensure the switch is in the off-position before connecting to power source, picking up or carrying the tool.*
- Remain alert at all times! *Never use the appliance when you are distracted or don't feel well.*
- Do not carry the appliance by the power cord and never hang it up by the power cord. *Always route the power cord away from the appliance to the rear. Keep cord away from heat, oil, sharp edges and moving parts. Do not use if*

the cord is worn or damaged.

- **The compressor and hoses can get very hot during operation.** *Touching them can cause burns.*
- **When removing the quick coupler, always hold the hose coupling firmly to avoid injury caused by the hose flying off.**
- **The appliance vibrates during operation.** *Therefore, always put it down during operation.*


INTENDED USE

Your analogue compressor is designed to be used from the standard 12V dc socket in most vehicles, to inflate car and biketyres, balls, etc. This product is intended for household, consumer use only.

THE SYMBOLS IN INSTRUCTION MANUAL

	Read the instruction manual before using.
	CE conformity.
	Safety alert. Please only use the accessories supported by the manufacturer.
	Wear safety glasses, hearing protection and dust mask.
	Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

SPECIFICATIONS

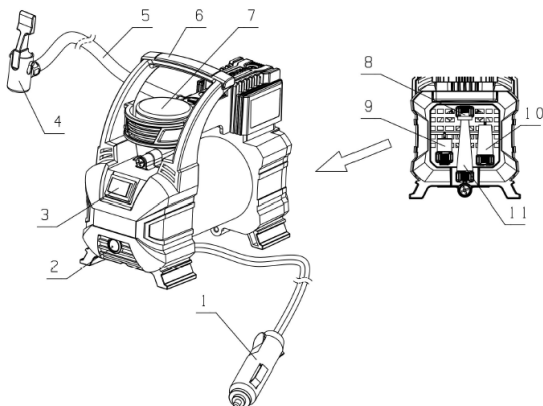

Components

- | | |
|----------------------------|-----------------------------|
| 1. 12V AC vehicle adapter | 7. Pressure gauge |
| 2. LED light | 8. Inflator needle valve |
| 3. Power switch | 9. Brass coupler adapter |
| 4. Universal valve adapter | 10. Short tapered nozzle |
| 5. High-pressure hose | 11. Standard tapered nozzle |
| 6. Handle | |

Technical specifications

Item No	AAC1408 AAC1408xy
Voltage	12V
Rated Current	10A
Flow rate	35L/Min
Max pressure	140PSI

Model No. Note: x (blank, 1,2,3,4,5,6,7,8,9,E,S,A,M); y (blank, -1,-2,-3,-4,-5,-6,-7,-8,-9,E,S,A,M)

OPERATION

To inflate Truck Utility Vehicles, Cars, and Motorcycle Tires:

1. To achieve optimal performance, when operating your air compressor, your vehicle's engine should be running.
2. Plug the compressor's power cord (1) into the battery of your vehicle. Press the lever (4) on the universal valve adapter down to lock onto the tire's air valve.
3. Turn the compressor ON (3)-begin to inflate tire.
4. When the pressure gauge indicates the desired pressure. Switch the unit OFF (3) and remove the air hose from the valve (normal tire pressure is 28-35PSI).

Precautions on use:

1. Allow sufficient cooling time before storing.
2. All parts are lifetime lubricated, and no oiling is required.
3. To avoid low voltage of auto battery, please have the engine running when using the air compressor.
4. Be sure the unit's power switch is in the OFF (3) position when not in use.

For All Other Inflatable Objects Including Bicycle Tires, Rafts, Air Beds, and Sports Balls:

1. Start your vehicle's engine, then plug the compressor's power (1) cord into the battery.
2. A selection of nozzles (8.9.10.11) is provided to fit most inflatable objects. Place the valve adapter over the stem of the inflator needle valve, brass couple adapter or tapered nozzles. Press the lever (4) on the universal valve adapter down to lock it in place.
3. Attach the appropriate nozzle to the inflatable object and turn on the power switch. When the object is inflated to desired firmness or pressure, turn the compressor off.

MAINTENANCE&MALFUNCTIONS


The only user serviceable part is a 10Amp fuse located I the 12V connector, this can be checked by unscrewing the spring-loaded centre pin from the plug. Only replace with a fuse with identical ratings. Make sure that the machine is not live when carrying out maintenance work. Regularly clean the machine housing with a soft cloth, preferably after each use. Keep the ventilation slots free from dust and dirt. If the dirt does not come off use a soft cloth moistened with soapy water. Never use solvents such as petrol, alcohol, ammonia water, etc. These solvents may damage the plastic parts.

The machine requires no additional lubrication.

ENVIRONMENTAL PROTECTION

In order to prevent the machine from damage during transport, it is delivered in sturdy packaging. Most of the packaging materials can be recycled. Take these materials to the appropriate recycling locations. Take your unwanted machines to your local dealer. Here they will be disposed of in an environmentally safe way.

Discarded electric appliances are recyclable and should not be discarded in the domestic waste! Please actively support us in conserving resources and protecting the environment by returning this appliance to the collection centres (if available).

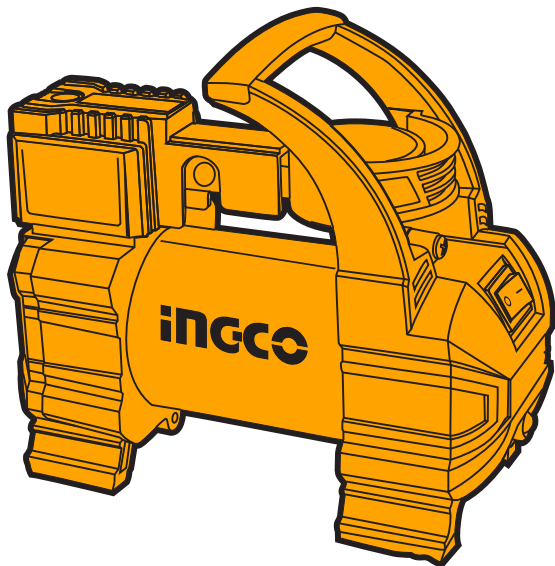

www.ingco.com

MADE IN CHINA 0624.V03

NEWWAY TECHNOLOGY (SUZHOU) CO., LIMITED
No.20 Dagang Road, Fuqiao Town, Taicang City, China.