



说明书材质要求：105g 有光铜版纸	说明书成品尺寸： 105*143mm
第一：专色用6级防晒油墨+CMYK油墨要求： 1.PANTONE137C专色油墨（专色用6级防晒油墨）： 如果自己配色，油墨配比为：酒联中黄（防晒）2000g 酒联金红（防晒）225g 2.C色油墨：酒联天蓝墨 3.M色油墨：酒联金红墨 4.Y色油墨：pantone123C专色油墨 5.K色油墨：酒联黑墨	第二：特别注意： 1.印刷时看样请参考我司提供的实物样品颜色。不得偏色 2.137C的专色不得参考C=0,M=35,Y=90,K=0对应的四色 色谱颜色来看样印刷 Pantone 137C Black（两色印刷）
折叠方式： 风琴折 （ 20P以下用风琴折 ）/ 骑马钉 （ 20P以上用骑马钉 ） 特殊情况：16P/20P：风琴折 + 对折	备注：

特别注意：此页内容不印刷

风琴折 + 对折 页面顺序

16P 页面顺序

9	10	11	封面
12	13	14	封底

1	2	3	4
5	6	7	8

20P 页面顺序

11	12	13	14	封面
15	16	17	18	封底

1	2	3	4	5
6	7	8	9	10


更改记录	1. 新设计			1. 更新转速			
	1124.V01	2024.11.11	LYD	0125.V02	2025.1.27	RHX	
	版本号	日期	设计师	版本号	日期	设计师	

INGCO

www.ingco.com

PRODUCT MANUAL

DRYWALL SANDER

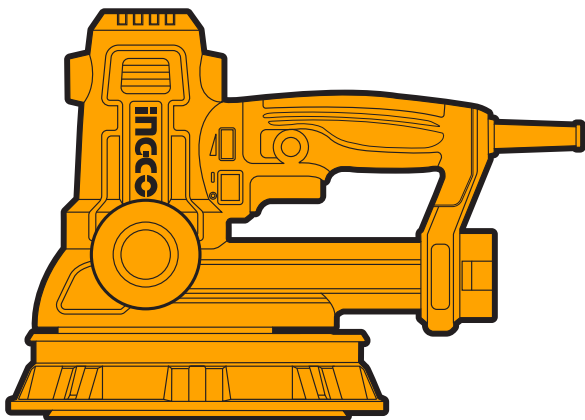

DWS10508 UDWS10508
DWS10508xy UDWS10508xy
x(blank,1,2,3,4,5,6,7,8,9,E,S,A,M,P)
y(blank,-1,-2,-3,-4,-5,-6,-7,-8,-9,-91,E,S,A,M,P)



GENERAL POWER TOOL SAFETY WARNINGS

⚠ WARNING! Read all safety warnings, instructions, illustrations and specifications provided with this power tool. *Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.*

Save all warnings and instructions for future reference.

The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

1) Work area safety

- a) **Keep work area clean and well lit.** *Cluttered or dark areas invite accidents.*
- b) **Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** *Power tools create sparks which may ignite the dust or fumes.*
- c) **Keep children and bystanders away while operating a power tool.** *Distractions can cause you to lose control.*

2) Electrical safety

- a) **Power tool plugs must match the outlet. Never modify the plug in any way.** **Do not use any adapter plugs with earthed (grounded) power tools.** *Unmodified plugs and matching outlets will reduce risk of electric shock.*
- b) **Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators.** *There is an increased risk of electric shock if your body is earthed or grounded.*
- c) **Do not expose power tools to rain or wet conditions.** *Water entering a power tool will increase the risk of electric shock.*
- d) **Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts.** *Damaged or entangled cords increase the risk of electric shock.*
- e) **When operating a power tool outdoors, use an extension cord suitable for outdoor use.** *Use of a cord suitable for outdoor use reduces the risk of electric shock.*
- f) **If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply.** *Use of an RCD reduces the risk of electric shock.*

3) Personal safety

- a) **Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. *A moment of inattention while operating power tools may result in serious personal injury.***
- b) **Use personal protective equipment. Always wear eye protection. *Protective equipment such as a dust mask, non-skid safety shoes, hard hat or hearing protection used for appropriate conditions will reduce personal injuries.***
- c) **Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool. *Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.***
- d) **Remove any adjusting key or wrench before turning the power tool on. *A wrench or a key left attached to a rotating part of the power tool may result in personal injury.***
- e) **Do not overreach. Keep proper footing and balance at all times. *This enables better control of the power tool in unexpected situations.***
- f) **Dress properly. Do not wear loose clothing or jewellery. Keep your hair and clothing away from moving parts. *Loose clothes, jewellery or long hair can be caught in moving parts.***
- g) **If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. *Use of dust collection can reduce dust-related hazards.***
- h) **Do not let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles. *A careless action can cause severe injury within a fraction of a second.***

4) Power tool use and care

- a) **Do not force the power tool. Use the correct power tool for your application. *The correct power tool will do the job better and safer at the rate for which it was designed.***
- b) **Do not use the power tool if the switch does not turn it on and off. *Any power tool that cannot be controlled with the switch is dangerous and must be repaired.***
- c) **Disconnect the plug from the power source and/or remove the battery**

pack, if detachable, from the power tool before making any adjustments, changing accessories, or storing power tools. *Such preventive safety measures reduce the risk of starting the power tool accidentally.*

- d) **Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool.** *Power tools are dangerous in the hands of untrained users.*
- e) **Maintain power tools and accessories. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use.** *Many accidents are caused by poorly maintained power tools.*
- f) **Keep cutting tools sharp and clean.** *Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.*
- g) **Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the power tool for operations different from those intended could result in a hazardous situation.**
- h) **Keep handles and grasping surfaces dry, clean and free from oil and grease.** *Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.*

5) Service

- a) **Have your power tool serviced by a qualified repair person using only identical replacement parts.** *This will ensure that the safety of the power tool is maintained.*

THE SYMBOLS IN INSTRUCTION MANUAL

	Double insulated for additional protection
	Read the instruction manual before using.
	CE conformity.
	Safety alert. Please only use the accessories supported by the manufacturer.
	Wear safety glasses, hearing protection and dust mask.
	Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

ADDITIONAL SAFETY WARNING

Instructions how to deal with harmful/toxic dusts arising from sanding e.g. lead painted surfaces, woods and metals. These instructions shall be preceded by a warning that contacts with or inhalation of these dusts can endanger the health of operator and bystanders. These instructions shall include the use of appropriate personal protective equipment.

RESIDUAL RISKS

Even when the power tool is used as prescribed it is not possible to eliminate all residual risk factors. The following hazards may arise in connection with the power tool's construction and design:

- a) Health defects resulting from vibration emission if the power tool is being used over longer period of time or not adequately managed and properly maintained.
- b) Injuries and damage to property due to broken accessories that are suddenly dashed.


WARNING

This power tool produces an electromagnetic field during operation. This field may under some circumstances interfere with active or passive medical implants. To reduce the risk of serious or fatal injury, we recommend persons with medical implants to consult their physician and the medical implant manufacturer before operating this power tool.

INTENDED USE

The power tool is intended for dry sanding dry wall that has had filler applied, ceilings and walls in indoor and outdoor areas, and for removing coats of paint, adhesive residues and loose plaster.

SPECIFICATIONS

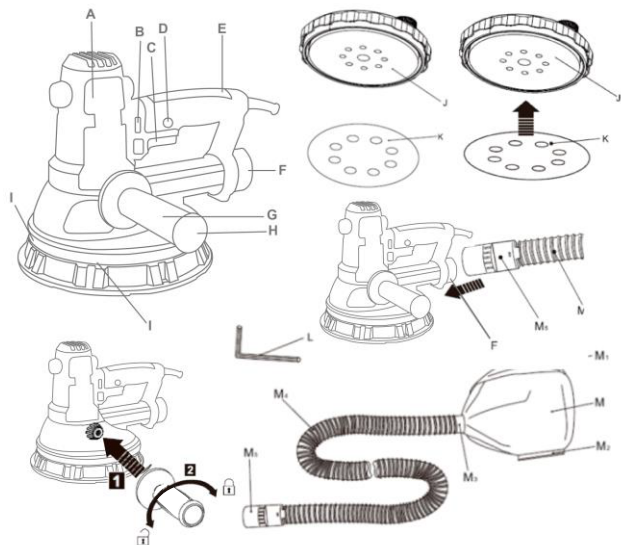

- A. Air vents
 B. Electronic speed control wheel
 C. On/off switch
 D. Lock button
 E. Main handle
 F. Dust extraction outlet
 G. Vacuum speed dial
 H. Auxiliary handle
 I. Guard
 J. Sanding pad
 K. Sanding paper
 L. Hex key
 M. Dust bag
 1. Belt
 2. Clasp
 3. Adaptor assembly
 4. Vacuum hose 5. Connector

Accessories

1. 8PCS sandpaper
2. 1PCS 2M hose
3. Spare a carbon brush
4. 1PCS S5 hex key
5. 1PCS dust collection bag

Technical specifications



Model No.	DWS10508 DWS10508xy	UDWS10508 UDWS10508xy
Rated power	850W	850W
Rated voltage	220-240V~50/60Hz	110-120V~50/60Hz
No-load speed	1000-2900/min	1000-2900/min
Round Sanding Pad	180mm	7"

Model No.	DWS10508-9 (INMENTRO Plug)	UDWS10508-9 (INMENTRO Plug)
Rated power	850W	850W
Rated voltage	220-240V~60Hz	127V~60Hz
No-load speed	1000-2900/min	1000-2900/min
Round Sanding Pad	180mm	7"

Model No. Note:

- x (blank, 1,2,3,4,5,6,7,8,9,E,S,A,M,D); y (blank, -1,-2,-3,-4,-5,-6,-7,-8,-9,E,S,A,M,D)
- Due to our continuing program of research and development, the specifications herein are subject to change without notice.

OPERATION PICTURE

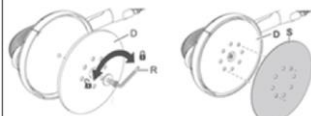A

B

C


Replace sanding pad A

- Insert the hex wrench R(size 5) into the hexagonal screw bolt on the sanding block
- Hold the sanding pad firmly, and then turn the wrench counter clockwise to dismount the pad.
- Install new sanding pad by tightening the bolt.

Warning: Only install the specified sanding pad on the machine. In order to ensure optimal performance, the machine should be run at slightly lower speed for several minutes to make the grinding pad fit the sealing surface perfectly. During this process, the white foam particles will come out from the sanding head. However, this won't damage the machine. Attaching and changing sanding disc3

- Place the sanding disc in the center of the sanding pad and press on. The holes in the sanding disc must be in alignment with the extraction holes in the sanding pad.
- For round sanding pad only: conduct a test run to check that the sanding disc is clamped in the centre.

Dust suction B

- Remove the vacuum hose with dust bag from the product, if necessary.
- Hold the dust bag over a suitable rubbish bag.
- Pull the clasp off the dust bag and empty it into the rubbish bag.
- Slide the clasp onto the rails on the dust bag and re-attach the vacuum hose and dust bag to the product.

Tool standard/airflow control C

- Turn on/off the drywall sander by switch Electronic speed control
 - Adjust the speed by turning the speed wheel , user can choose different speed for different sanding surface.
 - Constant speed control Keep the machine running at the same speed as selected.
- Do not overload by excessive pressure.

SANDING OPERATIONS

Once the machine and vacuum cleaner are set up and all safety measures and equipment are in place, begin by turning on the vacuum cleaner and then the machine.(If you are using a vacuum cleaner with integrated switching, then simply turn the machine on.)

Round sanding head

- Begin sanding and carefully contact the work surface as lightly as possible-just

enough to keep the sanding head flat against the surface.

-The pivot point in the sanding head allow the sanding disc to follow the contours of the work surface.

OPERATION

Caution

Always be sure that the tool is switched off and unplugged before adjusting or checking function on the tool.

Never actuate the shaft lock when the spindle is moving. The tool may be damaged.

Press the shaft lock to prevent spindle rotation when installing or removing accessories.

Caution

- Before plugging in the tool, always check to see that the switch trigger actuates properly and returns to the "OFF" position when released.
- Switch can be locked in "ON" position for ease of operator comfort during extended use. Apply caution when locking tool in "ON" position and maintain firm grasp on tool.

To start the tool, turn on the switch trigger. Release the switch trigger to stop. For continuous operation, turn on the switch trigger and then push in the lock button, and then release the switch trigger.

To stop the tool from the locked position, turn on the switch trigger fully, then release it.

Always be sure that the tool is switched off and unplugged before carrying out any work on the tool.

Always be sure that the side grip is installed securely before operation.

MAINTENANCE&MALFUNCTIONS

Possible malfunctions and methods of their eliminations


Malfunction	Probable causes	Actions
When the machine is turned on, the electric motor does not work.	• Switch failure • The power cord or wiring is broken, power cord plug malfunction; • No brush contact with the collector; • Wear/damage of brushes	Disconnect the machine from the mains and contact a qualified specialist.
Formation of a circular fire on the collector	• Brush wear/damage of the brush holder; • Malfunction in the armature coil	Disconnect the machine from the mains and contact a qualified specialist. Please don't repair the machine by your own.
When working, smoke or the smell of burning insulation appears from the ventilation openings.	• Malfunction in the electric motor coil; • Malfunction of the electrical part of the tool.	
Increased noise in the gearbox	• Wear/breakage of gears or bearings	
When the machine is turned on, the spindle does not rotate	• Gearbox failure.	

Critical state criteria

Critical state criteria	Probable causes	Actions
Cracks on the surfaces of bearing and housing parts	Fatigue deformation of metal	Disconnect the machine from the mains and contact a qualified specialist. Please don't repair the machine by your own.
The power cord or plug is damaged	Overload or breakage	
Excessive wear or damage to the motor or reductor mechanism, or a combination of signs	Fatigue deformation of metal	

Critical state criteria

List of critical failures	Actions
Electric motor sparking	It is necessary to contact a qualified specialist
The appearance of extraneous noise	It is necessary to contact a qualified specialist
If the above malfunctions are detected, it is necessary to disconnect the machine from the mains and contact a qualified specialist	

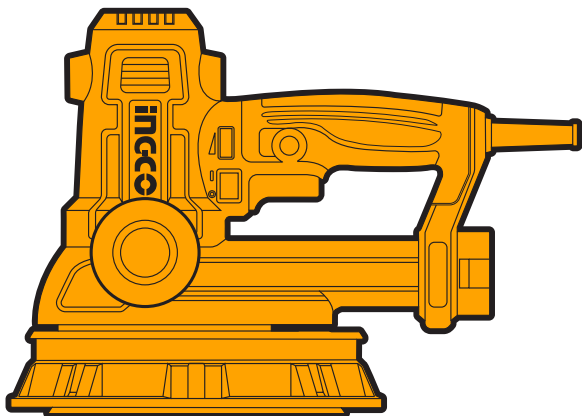

MADE IN CHINA 0125.V02

INGCO Global

www.ingco.com

NEWWAY TECHNOLOGY(SUZHOU) CO., LIMITED
No. 20 Dagang Road, Fuqiao Town, Taicang City, China.