



说明书材质要求: 105g铜版纸	说明书成品尺寸: 148x210mm
第一: 专色用6级防晒油墨+CMYK油墨要求: 1. PANTONE137C专色油墨(专色用6级防晒油墨): 如果自己配色, 油墨配比为: 洒联中黄(防晒)2000g 洒联金红(防晒)225g 2. C色油墨: 洒联天蓝墨 3. M色油墨: 洒联金红墨 4. Y色油墨: pantone123C专色油墨 5. K色油墨: 洒联黑墨	第二: 特别注意: 1. 印刷时看样请参考我司提供的实物样品颜色。不得偏色 2. 137C的专色不得参考C=0, M=35, Y=90, K=0对应的四色 色谱颜色来看样印刷 Pantone 137C C=0, M=100, Y=100, K=0 C=83, M=52, Y=0, K=0 Black (五色印刷)
折叠方式: 折叠	备注:

特别注意: 此页内容不印刷

包装检查要求: 所有文件必须全部打印出来, 检查, 签字, 文件留档	
自 查 人: 8847	检查日期: 2021. 7. 08
组 长: 8641	检查日期: 2021. 7. 08
采 购: 8871	检查日期: 2021. 7. 08
产品经理:	检查日期:
Q E :	检查日期:
研 发:	检查日期:

ingco

Tile Cutter

EN Tile Cutter



HTC04600



SCAN FOR VIDEO



INGCO Global




TECHNICAL DATA

MAX. CUTTING LENGTH: 600MM

MAX. CUTTING THICKNESS: 12MM

INSTRUCTION

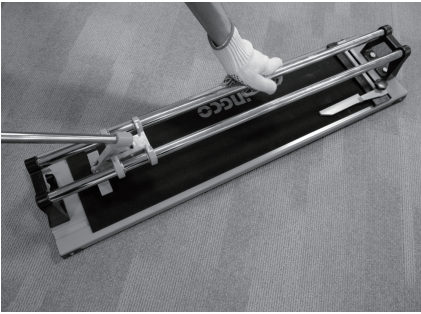


PLACE TILE ON BED OF CUTTER, THEN
POSITION TILE CUTTING WHEEL AT BASE
OF TILE TO BE CUT



SCORE TILE BY MOVING HANDLE
FORWARD WHILE PRESSING DOWN
LIGHTLY. KEEP STEADY PRESSURE FOR
THE FULL LENGTH OF THE TILE.
AT THE END OF SCORE THE WHEEL
WILL "DOCK" LEAVING THE ANVIL IN A
POSITION OVER THE SCORE LINE.




WITH THE WHEEL DOCKED, PRESS DOWN
LIGHTLY APPLYING INCREASING PRESSURE
UNTIL THE TILE SNAPS
(**TIP:** WHEN PRESSING DOWN ON THE HANDLE
WITH ONE HAND HOLD THE TILE DOWN WHERE
YOU STARTED SCORE WITH THE OTHER HAND.)

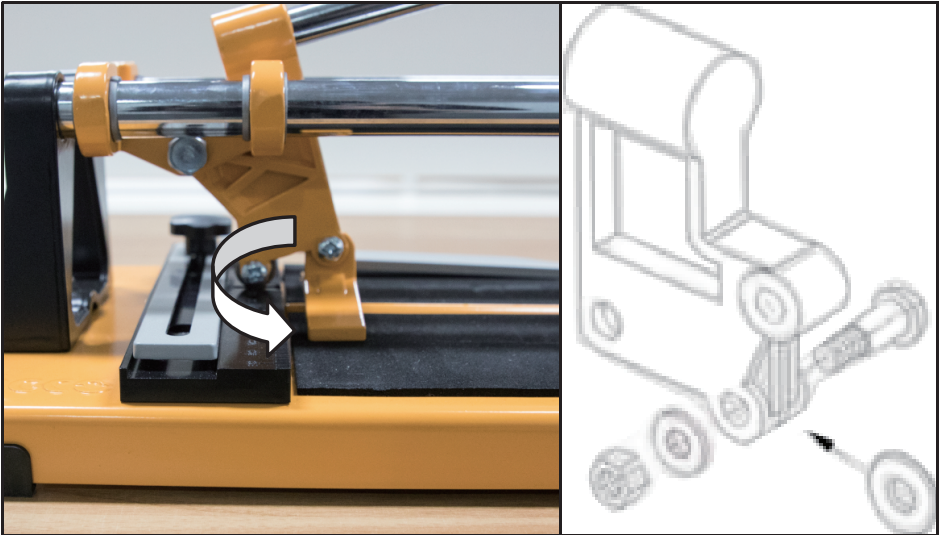

SPECIAL SAFETY INSTRUCTIONS

1. SAFETY GLOVES AND GOGGLES ARE REQUIRED WHILE OPERATING THIS MACHINE. THE TILE CUTTING MACHINE IS FITTED WITH REPLACEABLE CIRCULAR BLADE.
2. KEEP THE TILE CUTTER AND BLADE AWAY FROM CHILDREN.
3. AFTER USE, THE MACHINE MUST BE STORED IN A SAFE AND DRY PLACE.
4. THIS MACHINE HAS BEEN DESIGNED FOR CUTTING AND BREAKING GLAZED TILE, AND SHALL NOT BE USED FOR ANY OTHER PURPOSE.
5. ALWAYS PLACE THE TILE CUTTING MACHINE ON A LEVEL AND FIRM SURFACE.
6. CAUTION! THE EDGES OF CUT TILES ARE SHARP.

ingco

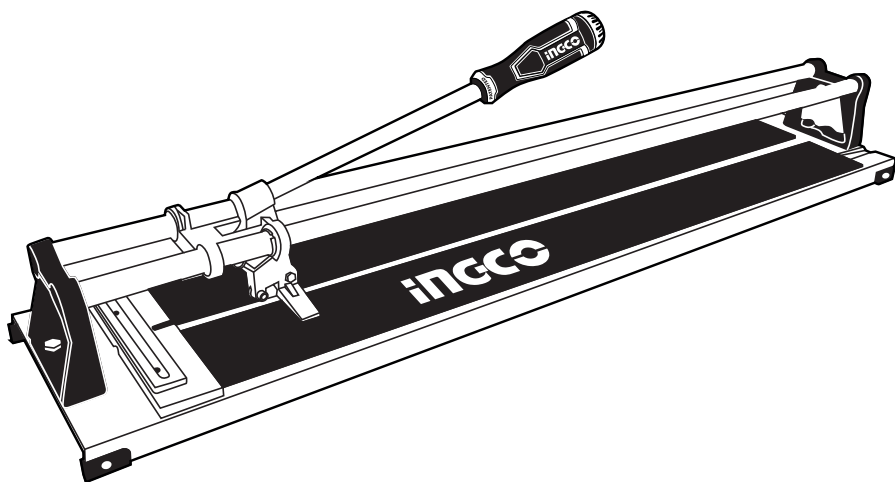

www.ingco.com
MADE IN CHINA
0721.V01

INGCO TOOLS CO., LIMITED
No. 45 Songbei Road, Suzhou
Industrial Park, China.

HTC04600