



说明书材质要求: 105g 有光铜版纸	说明书成品尺寸: 105x143mm
第一: 专色+CMYK油墨要求: 1. 专色油墨, 见实物色样调整 2. K色油墨: 洒联黑墨	第二: 特别注意: 1. 印刷时看样颜色请参考我司提供的实物样品颜色, 不得偏色。 2. 322C的专色不得参考C=100, M=28.42, Y=48.29, K=21.6 对应的四色色谱颜色来看样印刷
	 Pantone357C  Pantone137C  Black (三色印刷)
折叠方式: 风琴折	备注:

特别注意: 此页内容不印刷

风琴折 + 对折 页面顺序

16P 页面顺序

9	10	11	封面
12	13	14	封底

1	2	3	4
5	6	7	8

20P 页面顺序


11	12	13	14	封面
15	16	17	18	封底

1	2	3	4	5
6	7	8	9	10

更改记录	1. 新制作			
	0826.J01	2026.8.12	Kiko	
	版本号	日期	设计师	

Jadever

LITHIUM-ION BATTERY PACK

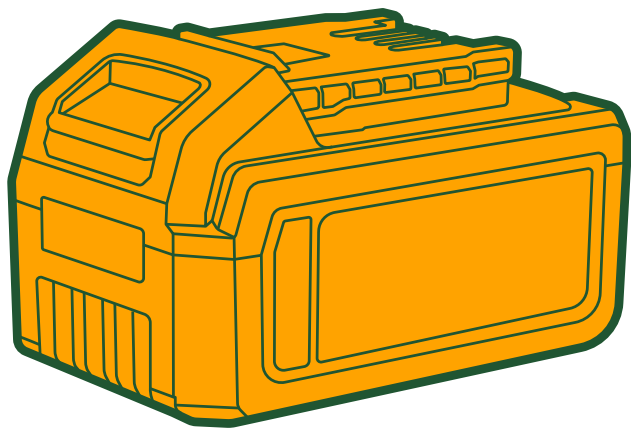

JDLBP540 JDLBP540xy

x(blank, 1, 2, 3, 4, 5, 6, 7, 8, 9, E, S, A, M)

y(blank, -1, -2, -3, -4, -5, -6, -7, -8, -9, E, S, A, M)

**PRODUCT
MANUAL**

Original Instructions

Product	Battery pack		
Model No.	Type	Rated voltage	Rated capacity
JDLBP540 JDLBP540xy	Lithium-Ion	18.5V d.c., 20V Max	4.0Ah

Model No. NOTE: x (blank, 1,2,3,4,5,6,7,8,9,E,S,A,M); y (blank, -1,-2,-3,-4,-5,-6,-7,-8,-9,E,S,A,M)

⚠ Warning

- Do not dismantle, open or shred secondary cells or batteries.
- Keep batteries out of the reach of children. Battery usage by children should be supervised. Especially keep small batteries out of reach of small children.
- Seek medical advice immediately if a cell or a battery has been swallowed.
- Do not expose cells or batteries to heat or fire. Avoid storage in direct sunlight.
- Do not short-circuit a cell or a battery. Do not store cells or batteries haphazardly in a box or drawer where they may short-circuit each other or be short-circuited by other metal objects.
- Do not remove a cell or battery from its original packaging until required for use.
- Do not subject cells or batteries to mechanical shock.
- In the event of a cell leaking, do not allow the liquid to come in contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.
- Do not use any charger other than that specifically provided for use with the equipment.
- Observe the plus(+) and minus(-) marks on the cell, battery and equipment and ensure correct use.
- Do not use any cell or battery which is not designed for use with the equipment.
- Do not mix cells of different manufacture, capacity, size or type within a device.
- Always purchase the battery recommended by the device manufacturer for the equipment.

- n) **Keep cells and batteries clean and dry.**
- o) **Wipe the cell or battery terminals with a clean dry cloth if they become dirty.**
- p) **Secondary cells and batteries need to be charged before use. Always use the correct charger and refer to the manufacturer's instructions or equipment manual for proper charging instructions.**
- q) **Do not leave a battery on prolonged charge when not in use.**
- r) **After extended periods of storage, it may be necessary to charge and discharge the cells or batteries times to obtain maximum performance.**
- s) **Retain the original product literature for future reference.**
- t) **Use the cell or battery only in the application for which it was intended.**
- u) **When possible, remove the battery from the equipment when not in use.**
- v) **Dispose of properly.**

Important safety instructions for battery cartridge

- 1) Before using battery cartridge, read all instructions and cautionary markings on battery charger, battery, and product using battery.
- 2) Do not disassemble battery cartridge.
- 3) If operating time has become excessively shorter, stop operating immediately. It may shorter, stop operating immediately. It may result in a risk of overheating, possible burns and even an explosion.
- 4) If electrolyte gets into your eyes, rinse them out with clear water and seek medical attention right away. It may result in loss of your eyesight.
- 5) Do not short the battery cartridge:
 - Do not touch the terminals with any conductive material.
 - Avoid storing battery cartridge in a container with other metal objects such as nails, coins, etc.
 - Do not expose battery cartridge to water or rain.
 - A battery short can cause a large current breakdown.
- 6) Do not store the tool and battery cartridge in locations where the temperature may reach or exceed 50 °C (122 °F).
- 7) Do not incinerate the battery cartridge even if it is severely damaged or is

completely worn

- 8) Be careful not to drop or strike battery.
- 9) Do not use a damaged battery.
- 10) Follow your local regulations relating to disposal of battery.

Save these instructions.

Tips for maintaining maximum battery life

- 1) Charge the battery cartridge before completely discharged. Always stop tool operation and charge the battery cartridge when you notice less tool power.
- 2) Never recharge a fully charged battery cartridge. Overcharging shortens the battery service life.
- 3) Charge the battery cartridge with room temperature at 10 °C - 40 °C (50 °F - 104 °F). Let a hot battery cartridge cool down before charging it.
- 4) Charge the battery cartridge if you do not use it for a long period (more than six months).

The tool will automatically stop during operation if the tool and/or battery are placed under one of the following conditions:

Overloaded:

The tool is operated in a manner that causes it to draw an abnormally high current. In this situation, release the switch trigger on the tool and stop the application that caused the tool to become overloaded. Then pull the switch trigger again to restart. If the tool does not start, the battery is overheated. In this situation, let the battery cool before pulling the switch trigger again.

Low battery voltage:

The remaining battery capacity is too low and the tool will not operate. In this situation, remove and recharge the battery.



   Jadevermall
www.jadevermall.com

KEYWAY TECHNOLOGY (NANTONG) CO., LTD
No.99, Gugang Road, Chongchuan District,
Nantong City, China
MADE IN CHINA 0826.J01

