



说明书材质要求: 105g 有光铜版纸	说明书成品尺寸: 105x143mm
第一: 专色+CMYK油墨要求: 1.K色油墨: 洒联黑墨	第二: 特别注意: 暂无
	 Black (单色印刷)
折叠方式: 风琴折 (20P 以下 用风琴折) 特殊情况: 16P/20P: 风琴折 + 对折	备注:

特别注意: 此页内容不印刷

风琴折 + 对折 页面顺序

16P 页面顺序

9	10	11	封面
12	13	14	封底

1	2	3	4
5	6	7	8

20P 页面顺序


11	12	13	14	封面
15	16	17	18	封底

1	2	3	4	5
6	7	8	9	10

更改记录	1. 新制作				
	0424.J01	2024.4.8	lamer		
	版本号	日期	设计师		

Jadever

HYDRAULIC CRIMPING TOOL

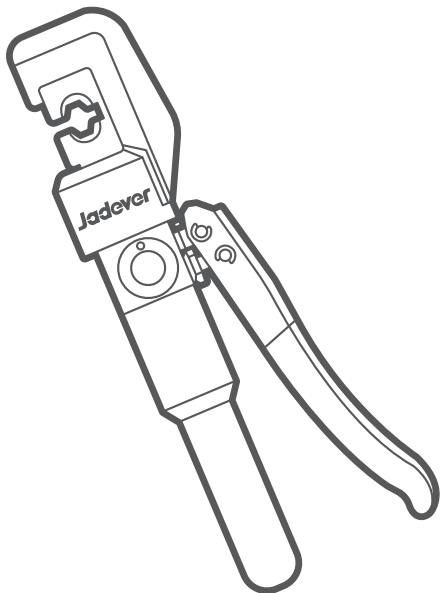

JDHT1D70 JDHT1D70xy
x(blank, 1, 2, 3, 4, 5, 6, 7, 8, 9, E, S, A, M)
y(blank, -1, -2, -3, -4, -5, -6, -7, -8, -9, E, S, A, M)

**PRODUCT
MANUAL**

GENERAL SAFETY WARNINGS**⚠ WARNING!**

Read all safety warnings, instructions, illustrations and specifications provided with this tool.

⚠ WARNING!

Save this instruction.

1. Work area safety

- a) Keep work area clean and well lit. Cluttered or dark areas invite accidents.
- b) Keep children and bystanders away while operating, distractions will cause you to lose control.

2. Personal safety

- a) Stay alert, watch what you are doing and use common sense when operating the tool. Do not use the tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating hydraulic tools may result in serious personal injury.
- b) Use safety equipment. Always wear eye protection. Safety equipment such as dust mask, non-skid shoes, hard hat, or hearing protection used for appropriate conditions will reduced personal injuries.
- c) Dress properly. Do not wear loose clothing or jewelry. Keep your hair, clothing and gloves away from moving parts. Loose clothes jewelry or long hair can be caught in moving parts.
- d) Do not force the tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it was designed.
- e) Store idle power tools out of the reach of children and do not allow persons unfamiliar with the hydraulic crimping tool. This tool is dangerous in the hands of untrained users.
- f) Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the Hydraulic crimping tool operation. If damaged, have the Hydraulic crimping tool repaired before use. Many accidents are caused by poorly maintained power tools.
- g) Use the Hydraulic Crimping Tool, accessories and tool bits etc., in accordance

with these instructions and in the manner intended for the particular type of tool, taking into account the working conditions and the work to be performed. Use of the Hydraulic Crimping tool for operations different from those intended could result in a hazardous situation.

3. Service

- a) Have your Hydraulic Crimping Tool serviced by a qualified service technician using only identical replacement parts. This will ensure that the safety of the Hydraulic Crimping Tool is maintained.

THE SYMBOLS IN INSTRUCTION MANUAL

	Read the instruction manual before using.
	Safety alert. Please only use the accessories supported by the manufacturer.
	Wear safety glasses, hearing protection and dust mask.
	Wear non-slip, liquid-resistant gloves.

ADDITIONAL SAFETY WARNINGS

Specific safety rules

- a) **Maintain labels and nameplates on the tool which carry important safety information.** If unreadable or missing, contact the agent to replace.
- b) **This product is not a toy,** keep it out of reach of children.
- c) **Do not** slide your fingers in the dies profile.
- d) **Do not** put your fingers in the head of the hydraulic crimping tool when you slide the dies inside it. Your fingers could be pinched very severely.
- e) **Do not** use the tool without die.
- f) **Do not** crimp on live cables or conductors
- g) **Do only crimp cooper** or Aluminum conduct material
- h) **The warnings, precautions, and instructions discussed in this instruction manual cannot cover all possible conditions** and situations that may occur.

It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.

INTENDED USE

Hydraulic Crimping Tool is a tool for connecting lugs and cable. It carries many advantages of good design, easy operation, high pressure, high efficiency and etc. It is a perfect tool to be used in electrical construction site.

SPECIFICATIONS

Technical specifications

Model No.	JDHT1D70 JDHT1D70xy
Crimping range	Cu 4-70mm ²
Crimping force	45kN
Crimping type	hexagon crimping
Stroke	11mm
Hydraulic oil	T 15#
Working temperature	-20°C-40°C
Length	approx. 310mm
Net weight	approx. 1.80kg
Package	Plastic box

NOTE: x (blank, 1,2,3,4,5,6,7,8,9,E,S,A,M); y (blank,-1,-2,-3,-4,-5,-6,-7,-8,-9,E,S,A,M)

- Due to our continuing program of research and development, the specifications herein are subject to change without notice.

Accessories

1. Crimping die 9pcs (4, 6, 8, 10, 16, 25, 35, 50, 70 mm²)
2. Sealing O-ring 1set

OPERATION

WARNING!

The dust or air inside the tool will damage the sealing kit so caused the tool lose function. Make sure the oil is clear and no dust entering into oil when changing oil. Wait for a while and exhaust the oil completely out of the oil tube before inserting the oil plug.

CAUTION!

Please wear the rubber gloves to avoid skin touching the oil directly, if touches it in careless, please wash the skin by soap water in timely. In order to protect the environment please drain the waste oil to the treatment center where was approved by government.

MAINTENANCE&SERVICE

Troubleshooting

Fault	Analysis	Solution
No pressure or the pressure is not enough during operation.	1. The pump lack oil. 2. There is dust exist in oil. 3. Inner leakage.	Fulfill or replace the oil Change the oil. Contact manufacturer or distributor.
The lug and wire do not connect tightly after crimping.	1. The tool cannot reach to the rated pressure. 2. Use the wrong die.	Refer to the fault A. Replace with the right die.
Generate a lot of burs after crimping.	Use the wrong die.	Replace with the right die.
Oil leakage on the head or on the ram.	Sealing kit broken.	Contact manufacturer or distributor and replace it by trained person.



   Jadevermall
www.jadevermall.com

KEYWAY TECHNOLOGY (NANTONG) CO., LTD
No.99, Gugang Road, Chongchuan District,
Nantong City, China

MADE IN CHINA 0424.J01

